

About the layout / design of the

Common Emitter/Collector Amplifier Board


v8.2 - Commen_Emit_Coll_Amp_v8.2_2026.07.13-1350

Rev. 1 - 2026.07.14-1330

<https://ufelectronics.eu/product/common-emitter-collector-amplifier-board-v8-2/>

v8.2 has, compared to v8.1, additional footprints for:

- Breadboard-friendly input and output pin header footprints.
- Breadboard power connection footprints for both the input and output sides.
- Optional jumper locations south of C10 and between R4 and C2.
- A staging area for testing trimmers before permanent installation (using a female pin socket).
- Increased spacing in several areas for easier assembly and soldering.

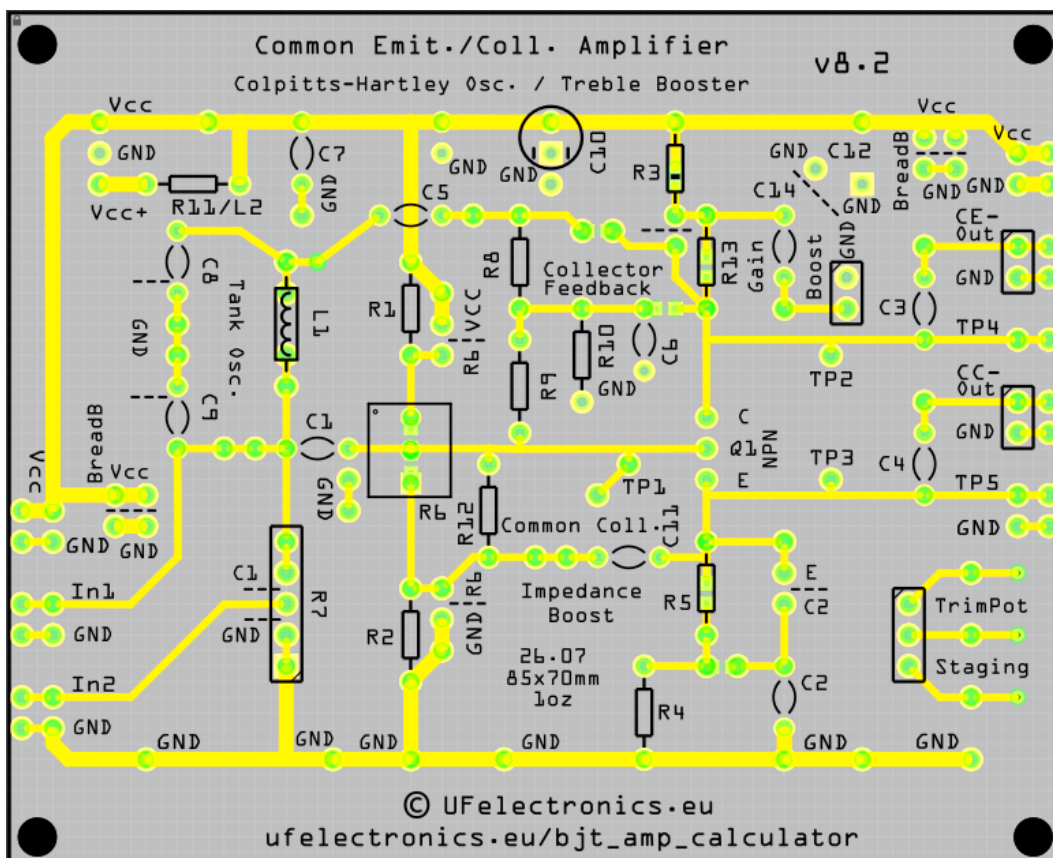

Foreword.....	3
Overall Concept.....	3
Educational Design Philosophy.....	3
Overall Layout.....	3
The Various Parts of the Layout.....	4
Input/Output.....	4
Input Connectors - In1, In2, Vcc, Gnd, BreadB.....	4
Output Connectors - CE-out, CC-out, Vcc, TP4, TP5, BreadB.....	4
Power supply and lab equipment connectors.....	5
Vcc.....	5
Vcc+ - R11/L2.....	5
Ground.....	6
Colpitts osc. / Tank circuit - C8, C9, L1, C5.....	6
Biasing the transistor - R1, R2, R6.....	7
R6.....	7
R2.....	7
R1.....	7
Biasing.....	7
Feedback options.....	7
Collector Feedback - R8, R9, R10 and C6.....	7
C6.....	7
C11, R12 - Impedance Boosting for Common collector, etc.....	8
The collector resistor - R3, R13, C14.....	8
R3.....	8
Gain Boost - R13, C14 and division of R3.....	8
The emitter side.....	9
SMD footprints for circuit variations - R5, C2.....	9
R5.....	9
R4.....	9
C2.....	9
Emitter Circuit Examples.....	9
Ex. 1 - Degeneration Resistor.....	9
Ex. 2 - Bypass Capacitor.....	10
Ex. 3 - Split Degeneration Resistor.....	10
Ex. 4 - Attenuated Bypass Cap. - Recommended Configuration.....	10
Ex. 5 - Variable Splited Deg. Resistor.....	10
Test Points.....	11
Suggestions?.....	11
Contact.....	11
Social.....	11
Semi-Schematic Layout.....	12
Assembly Sheet.....	13

Foreword

A single-transistor amplifier may seem simple, and it is. But that simplicity is also its greatest strength as a learning tool.

When you build, tweak, and measure these circuits yourself, you quickly discover the gap between theoretical calculations and practical reality. Biasing is rarely perfect, gain is limited, and small changes can have large effects.

Once these limitations become clear through hands-on experience, the motivation to move toward more advanced topologies naturally arises. In that context, the differential amplifier stands out as a powerful next step, offering significantly improved stability, linearity, and control.

This board is therefore not just a tool for learning how transistor amplifiers work, but also for understanding why more advanced designs are needed.

In that sense, mastering the simple amplifier is not the end goal - it is the foundation for everything that follows.

It is through these limitations that real understanding begins.

Overall Concept

This is a PCB board for experimentation and testing of a single NPN BJT amplifier circuit. - Through-hole components are chosen to make it beginner friendly.

Educational Design Philosophy

The footprints, routing, and component placement have been optimized to encourage experimentation, easy probing, and circuit modification while maintaining good analog performance, rather than optimizing the PCB for one fixed application.

Overall Layout

The components are placed semi-schematic to make the mental shift between schematic and PCB as easy as possible; Helping users relate schematics to their physical implementation.

I would normally place the traces on the bottom side, when using through-hole components. But the traces are in this case deliberately placed on the top side, to make them visible without having to check the bottom how the traces run.


The opposite site of the trace side, in this case the bottom side, is a full ground plane.

There is deliberately no ground plane on the top, the component side, to make it easier to differentiate visually and to see the traces. For the same reason, a purple solder mask was chosen to make the traces easier to see.

The Various Parts of the Layout

Input/Output

The left side of the PCB is intended to receive potential input signals. The right side is intended to provide potential output signals. Both are spaced vertically so that one larger pin header, connecting to external circuits, can be used across the multiple inputs and outputs at the same time.

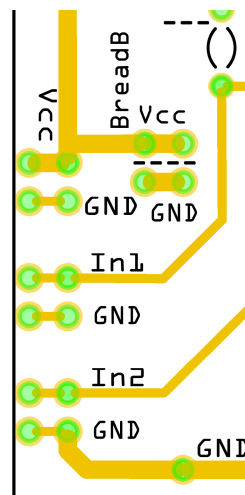

Input Connectors - In1, In2, Vcc, Gnd, BreadB

For the left input side we talk about the pairs Vcc-ground, In1-ground, and In2-ground.


In1 goes directly to the coupling capacitor feeding into the base of the transistor. Whereas In2 goes to a potential variable resistor/potentiometer, that can sway between feeding the same coupling capacitor as mentioned before, or ground.

The left column of pin footprints, just next to the edge of the PCB, is intended to be used on the bottom side for male pin headers. With these right on the edge, you will be able to collect a signal from a potential breadboard attached, feeding the PCB with a signal.

The right column of pin footprints is intended to be used for top side male pin headers.

'BreadB' denotes the possibility to add power pins on the bottom side for connecting with the power rails on a breadboard related to the left input side.

Note: Be aware how you populate 'BreadB'. Only use one of each Vcc and GND footprints at a time, and always be sure the breadboard uses it in the same way, **- If not, you will short-circuit your power supply !** - If in doubt, don't use them.




Output Connectors - CE-out, CC-out, Vcc, TP4, TP5, BreadB

For the right output side we talk about the pairs Vcc-ground, CEout-ground, TP4, CCout-ground, TP5 and 'BreadB'. - Where 'TP' stands for 'Test Point'.


On the right side, TP4 and TP5 are directly connected to collector and emitter of the transistor respectively. CEout and CCout are the decoupled signal of TP4 and TP5 respectively.

All power supply and signal connectors are followed by their own ground just next to them. This is to keep a potential magnetic loop as small as possible and avoid noise. Partial exception is TP4.

The right column of pin footprints, just next to the edge of the PCB, are supposed to be used on the bottom side for male pin headers. With these right on the edge, you will be able to feed the signals into a potential breadboard and further circuit attached.

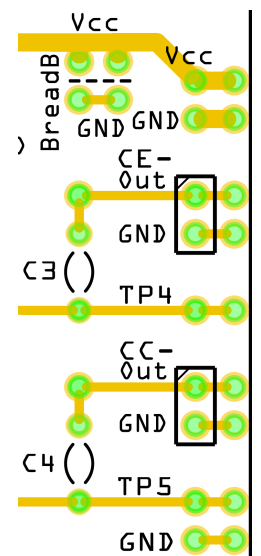

The left column of pin footprints are supposed to be used for top side male pin headers.



'BreadB' denotes the possibility to add power pins on the bottom side for connecting with the power rails on a breadboard related to the right output side.

Note: Be aware how you populate 'BreadB'. Only use one of each Vcc and GND footprints at a time, and always be sure the breadboard uses it in the same way, **- If not, you will short your power supply !** - If in doubt, don't use them.


Power supply and lab equipment connectors

Vcc

There are Vcc and ground connectors at the left-top and right-top. These are in pairs, and sitting close for connecting a single two-pin pin header, preferably male, as these make it easy to connect lab probes also.

There is an additional Vcc connector option a little separate from the top-left Vcc-ground pair, so that the Vcc from a lab power supply can be attached here, without getting too close to a ground pin.

The Vcc trace has three footprints for decoupling capacitors. Also an unmarked option for a small fourth one.

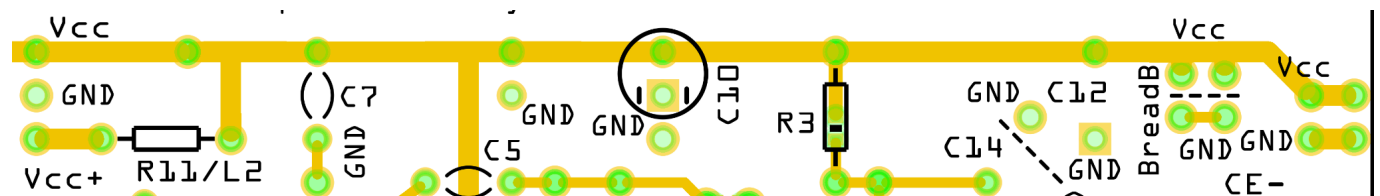

Vcc+ - R11/L2


At the left-top side, you will now encounter 'Vcc+', added with the upgrade from version 8 to 8.1.

The Vcc+ input allows an optional resistor, ferrite bead, or inductor to be inserted in series with the supply voltage, R11/L2.

Together with the nearby decoupling capacitors, this creates a simple supply filter that helps isolate the circuit from noise on the power rail. It can also reduce the amount of noise that the circuit itself injects back into the power supply.


This makes it easier to experiment with supply filtering techniques and observe their effect on circuit performance.

Ground



At the lower edge of the PCB you will find several options for ground connected male pin headers. As with the Vcc, you also need the possibility to connect various lab equipment to ground. Even more so for ground than for Vcc.

Colpitts osc. / Tank circuit - C8, C9, L1, C5

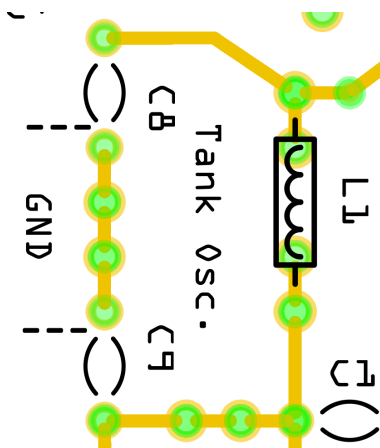


At the left side of the top-left quadrant, you will find the space for a tank circuit. The area labeled “Tank Osc.” represents a Colpitts oscillator configuration. This circuit consists of an inductor (L1) and two capacitors (C8 and C9).

The capacitor (C9) and one side of the inductor (L1) are connected to the input side of the input coupling capacitor (C1). The same capacitor and inductor share the same trace to In1 and one side of the potentiometer coming from In2.

The top side of the Colpitts oscillator has a positive feedback path from the collector via the capacitor footprint C5.

- **NOTE: This feedback and the tank circuit does not work, unless you solder the trace 'south' of C10 to the collector trace at R3.** - Give it a solder blob or mount a jumper.

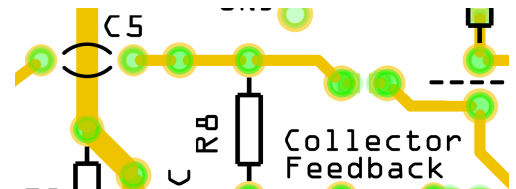

A fixed trace is omitted here, to give the option of eliminating potential antenna effects of the feedback trace at higher oscillations.

Biasing the transistor - R1, R2, R6

R6

On the output side of the coupling capacitor (C1) going to the base of the transistor, you will see a footprint for a trimpot; R6.

R2

From R6 going to ground, you will find two options; Another footprint for another trimpot, next to a footprint for a standard resistor (R2). - Of course, only one of those should be used.

R1

Again going from the trimpot R6 to Vcc, you will find an equal configuration for R1 as for R2.


Biasing

When you want to bias a transistor, you will often find that theory and practice are two different things. Even the best calculations can be hard to get correct, as not all factors can be included easily without special tools.


That is the reason the various footprints for trimpots are included. It gives some flexibility after the component values are chosen.

A BJT Amplifier Calculator is available for getting rough estimates of the various resistors at:

https://ufelectronics.eu/bjt_amp_calculator - It's free to use and it doesn't contain ads.

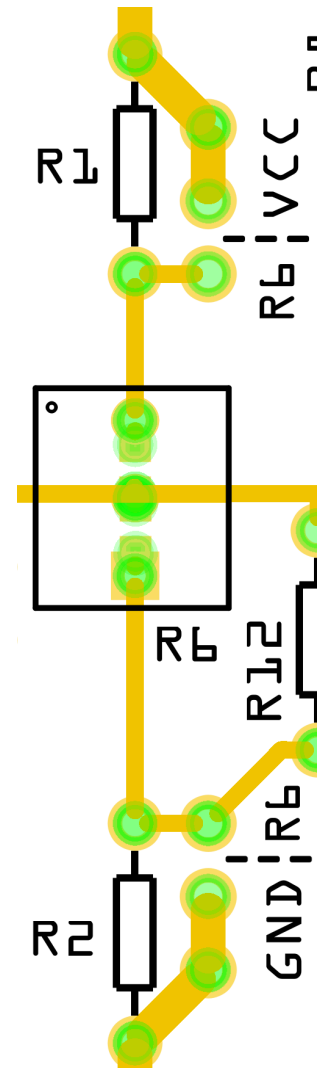

Feedback options

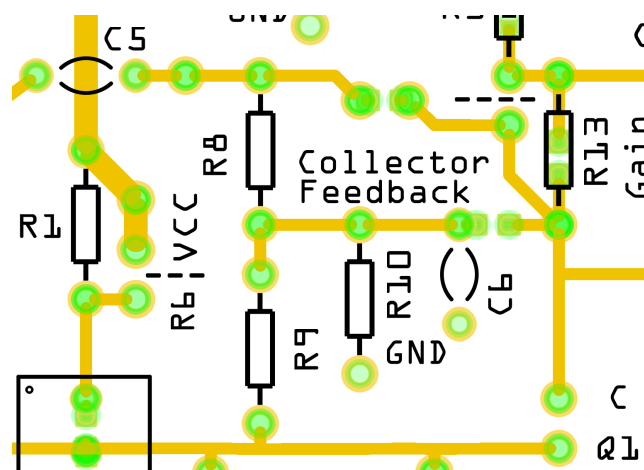

Collector Feedback - R8, R9, R10 and C6


The area 'North' of the trace going horizontally from R6 to the base of the transistor, can be used for various feedback circuits. This could be a simple treble booster or to create a crystal oscillator. Users can implement additional feedback networks based on their specific application.

C6


There is an option to make a solder bridge from the top pad of C6 to the collector trace of the transistor. Again, the use depends on your specific schematic.

C11, R12 - Impedance Boosting for Common collector, etc.

Just 'South' of the trace going horizontally from R6 to the base of the transistor, you will find other feedback options. Explore it yourself according to your wishes.

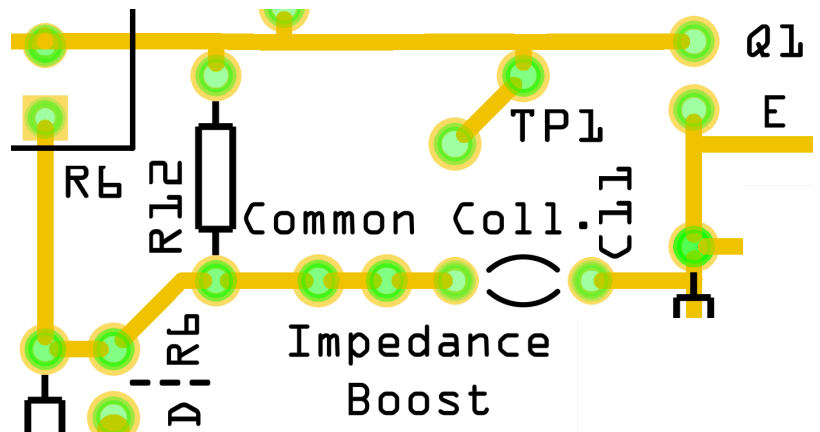

The collector resistor - R3, R13, C14

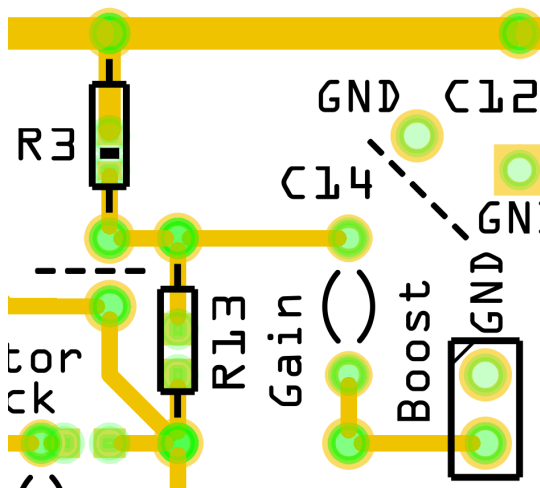

This resistor R3 is either shorted when the circuit is configured as a common collector, or used as a fixed resistor for common emitter operation. - So here, no trimpot footprint has been provided.

This resistor R3 might even get hot, depending on the values and transistor selected, which is even less ideal for trimpots.

If you want a simple BJT amplifier, only using R3 as a single collector resistor, R13 is intended to be shorted by a solder blob or a wire. - Or, **even better**, just solder the south end of R3 directly into the next lower footprint, separated by a

dashed line. ;)


Gain Boost - R13, C14 and division of R3

If, for some reason, you want to divide a single R3 collector resistor into two resistors, you can do so by using R3 and R13 in combination. - Now, without shorting R13 !

Using R3 and R13, together with C14, it is possible to implement gain boost at this place. The feedback to this place, 'south' of C14, would for instance have to come from the output of a common collector stage: From T5 and its adjacent ground pin would be an optimal source.

- Pull a ground wire together with the signal wire. Even twist them, to hold them together. This reduces the magnetic loop of the feedback signal to a minimum.

The emitter side

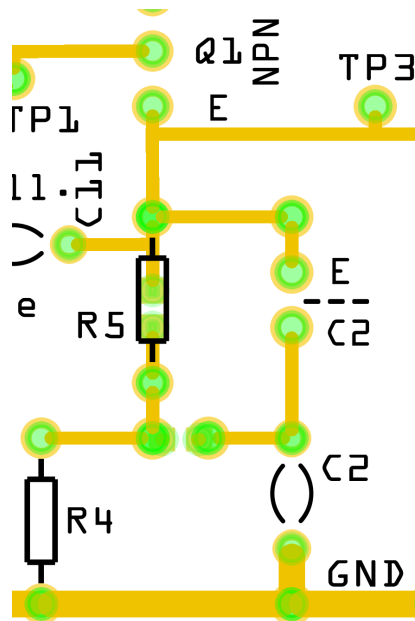

SMD footprints for circuit variations - R5, C2

As there are various ways to shape the circuit on the emitter side, there is added SMD footprints to easily be able to connect with a solder blob according to your circuit.

Below R5 you can see one of them. Give it a solder blob if you don't need R5 in your circuit. - Or simply add a wire to short it.

To the left of the top of C2, between C2 and R4, you can see another SMD footprint. This serves as an optional place for adding a solder blob, to connect the two traces. - Or simply add a wire or a jumper to short it. - The use depends on your circuit.

R5

To the right of R5 is there an option for a trimpot. This trimpot adjusts the emitter degeneration and therefore controls the effective gain when

C2 is used for bypassing. Inside the footprint of R5, as mentioned before, you find the SMD footprint for optional short -circuiting it with a solder blob.


R4

This is the 'standard' emitter resistor, potentially bypassed by C2. No trimpot footprint included here. Just change the resistor if needed like you would do with R3.

C2

This is obviously the bypass capacitor for the emitter of the transistor circuit.

Emitter Circuit Examples




Ex. 1 - Degeneration Resistor


R4 is acting as a degeneration resistor. R4 improves the gain stability over temperature, at the cost of overall less gain. Without R4, there is only the internal emitter resistance 're' in the transistor.

're' is calculated as follows: $r_e = 26 \text{ mV} / I_e \text{ mA}$

The initial estimated DC gain (A_v) is calculated as $A_v = R_3 / (R_4 + r_e)$.

Don't solder the SMD / jumper bridge 'south' of R5.

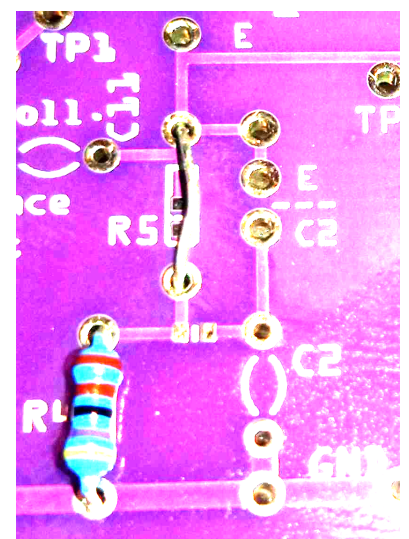





Ex. 2 - Bypass Capacitor

This example is adding C2 as bypass capacitor, to improve gain to a "maximum".

C2 blocks the direct current (DC, from the biasing of R3 and R4), but lets alternating current (AC) through. This means that AC signals don't "see" R4, they go "directly" to ground via C2, and hence are amplified to a "maximum".



Note the solder bridge (=short) 'south' of R5.

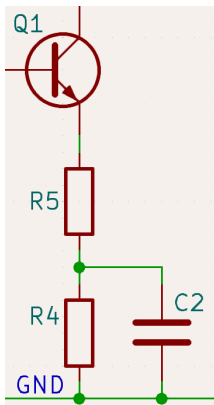


Ex. 3 - Split Degeneration Resistor

Adding C2 can increase the gain so much, that the signal could distort. So adding R5 can reduce the gain of the bypass capacitor C2.

The DC voltage will see the sum of R4 and R5, while the AC signal only will see R5.

Note the solder bridge (=short) 'south' of R5.


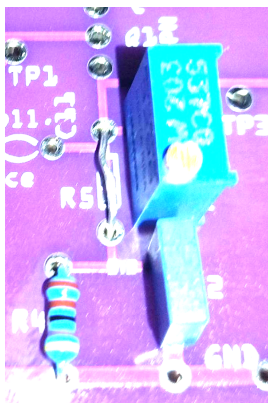


Ex. 4 - Attenuated Bypass Cap. - Recommended Configuration

As a fixed value for R5 can be hard to determine from the start, an option to add a trimpot instead is available. This can eliminate R5 as being in series with R4, and makes the circuit easier to adjust, as the modulation of the amplification isn't tied to the overall resistance R4 and R5 in series.

In this example, DC sees only R4, and AC sees only R5.


Don't solder the bridge 'south' of R5.

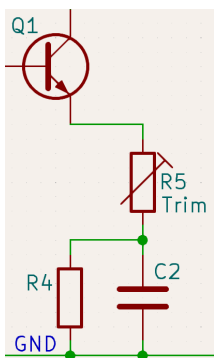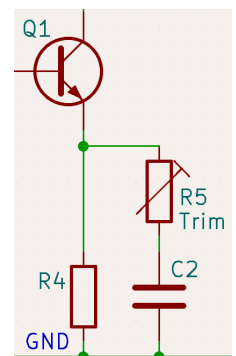

Ex. 5 - Variable Split Deg. Resistor

If you liked example 3, this one gives you some flexibility by substituting the fixed value of R5 with a trimpot. Be aware that the gain will also vary, as you adjust the trimpot, due to the initial estimated DC gain is $A_v = R_3 / (R_4 + R_5 + r_e)$.

Note the solder bridge (=short) 'south' of R5.

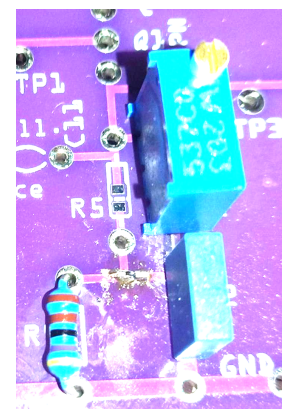


Test Points

Next to TP4 and TP5, there is TP1 on the base, TP2 on the collector and TP3 on the emitter.

TP4 is equal to TP2. TP4 is used as output for the common emitter configuration.

TP5 is equal to TP3. TP5 is used as output for the common collector configuration.

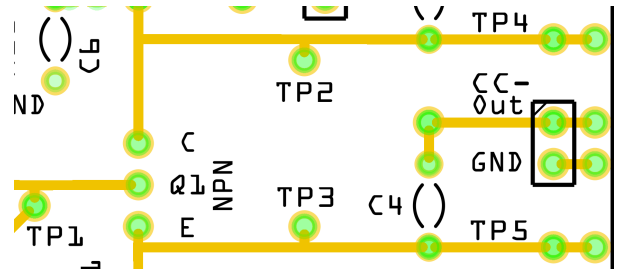

All the mentioned test points can be mounted with male pin headers for easy connection to test equipment. Without pin headers, especially TP1, TP2 and TP3, they are easier to place a probe on for quick measurements.

The test points are obviously not real PCB test points, as those are without a hole in the middle. The choice of the hole is because it makes it easier to fix a probe in, without the probe slipping around.

Suggestions?

Have suggestions for improvements, or need a personalized PCB design? - Feel free to get in touch:

Contact

<https://ufelectronics.eu/about/contact/>

Social


YouTube: <https://www.youtube.com/@ufelectronics>

Discord: <https://discord.com/channels/1373552306817339535/1373552307467325542>

Facebook: <https://www.facebook.com/profile.php?id=61577320711532>

LinkedIn: <https://www.linkedin.com/company/ufelectronics/posts/?feedView=all>


Semi-Schematic Layout

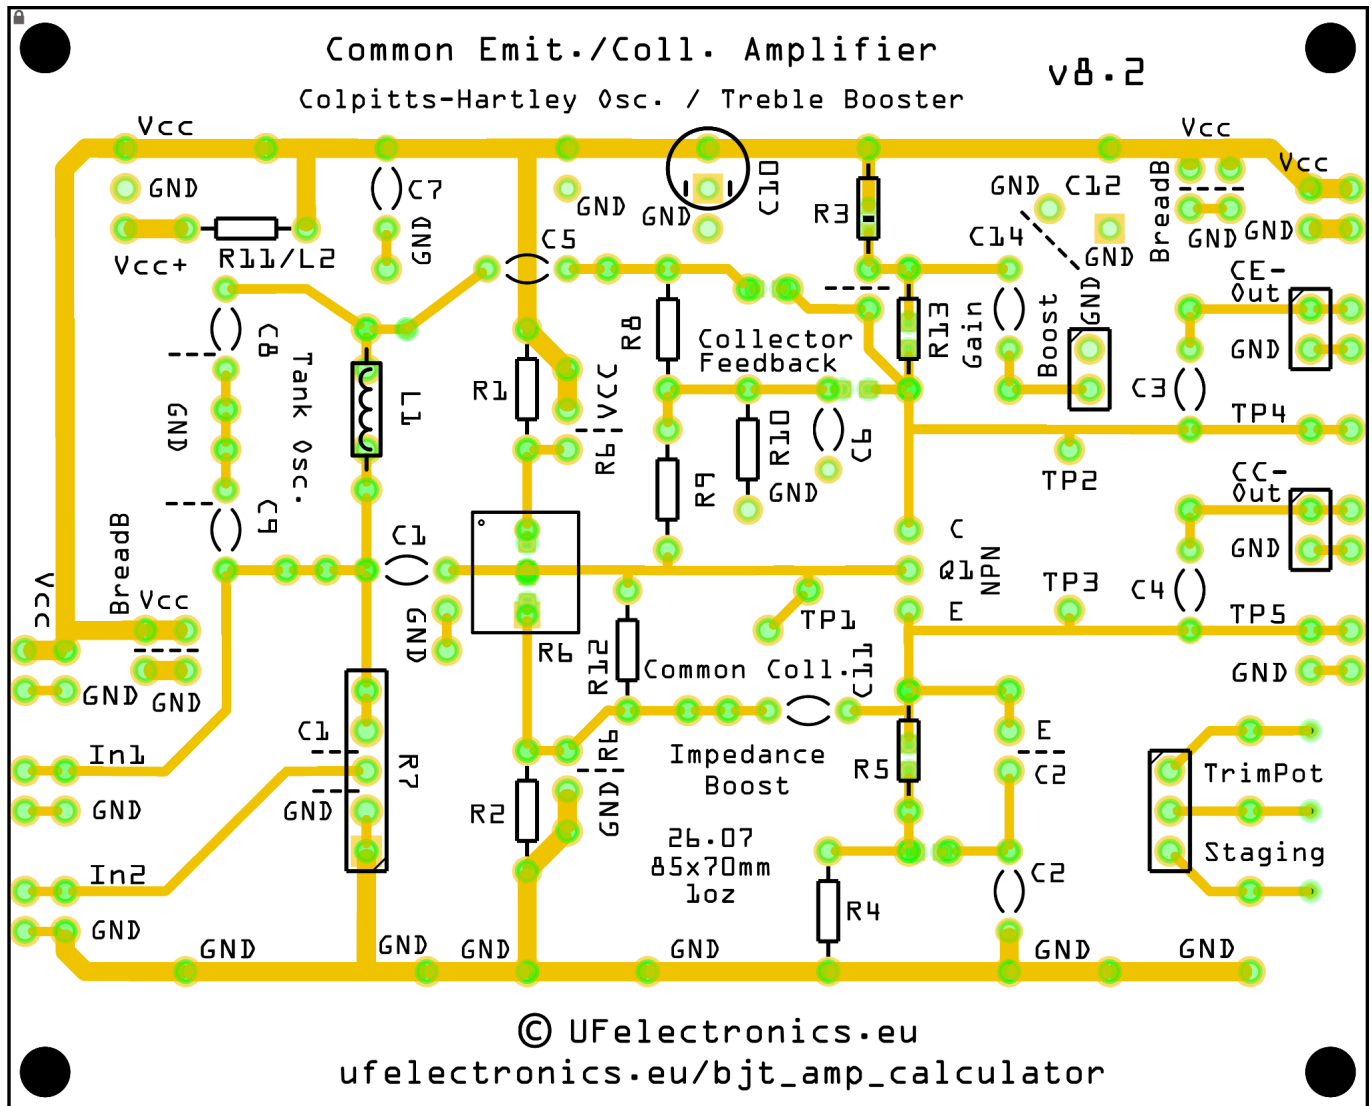

The figure above shows the routing on the top layer of the PCB.

Ground is routed on the bottom side of the PCB. The bottom layer with the ground plane is not visible in the figure above.

Assembly Sheet

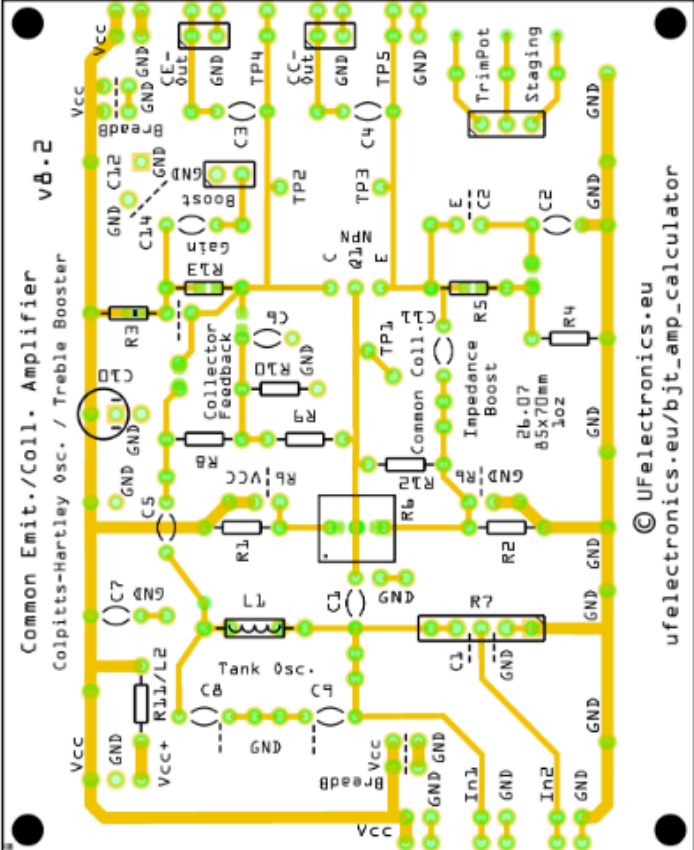Common Emitter / Collector Amplifier - v8.2 - Assembly Sheet				
Circuit	Vers. / Date :			
	Resistors	Value	Capacitors	Value
	R1		C1	
	R2		C2	
	R3		C3	
	R4		C4	
	R5		C5	
	R6		C6	
	R7		C7	
	R8		C8	
	R9		C9	
	R10		C10	
	R11/L2		C11	
	R12		C12	
	R12		C13	
	R13		C14	
Notes	Vcc:			
	Other			
	L1		Q1	
		L2/R11		